

WHELEN[®] ENGINEERING COMPANY INC.

Route 145, Winthrop Road,
Chester, Connecticut 06412
Phone: (860) 526-9504
Fax: (860) 526-4078

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: autocan@whelen.com
Customer Service e-mail: custserv@whelen.com


Installation Guide: Lighthead Kit SLDK** Lighthead Kit SLEK**

1. Disconnect the lightbar from the vehicle battery.
2. Using a Torx[®] screwdriver, remove the endcap nearest to the installed location of the new lighthead.
3. Slide the necessary lenses and lens dividers out of the extrusion until the desired lighthead housing is accessible.
4. Using a small, flat blade screwdriver, gently disengage the lighthead housing's retaining fingers from the filler panel's mounting tabs and remove panel from the lightbar.
5. Plug the new lighthead connector into the connector found in the lighthead housing and snap the lighthead into place. Confirm all four retaining fingers fully engage the lighthead's mounting tabs.
6. Reconnect the lightbar to the battery and test the operation of the newly installed lighthead. If the

new lighthead does not function properly, contact customer service.

7. Return the items removed in step 3 to their original position and remount the endcap. Tighten mounting screws to 40 in./lbs.

Top View

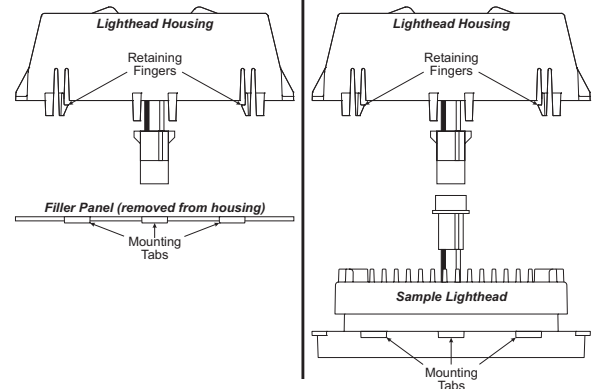

©2005 Whelen Engineering Company Inc.
Form No.13989A (021207)

For warranty information regarding this product, visit www.whelen.com/warranty

WHELEN[®] ENGINEERING COMPANY INC.

Route 145, Winthrop Road,
Chester, Connecticut 06412
Phone: (860) 526-9504
Fax: (860) 526-4078

Internet: www.whelen.com
Sales e-mail: autosale@whelen.com
Canadian Sales e-mail: autocan@whelen.com
Customer Service e-mail: custserv@whelen.com


Installation Guide: Lighthead Kit SLDK** Lighthead Kit SLEK**

1. Disconnect the lightbar from the vehicle battery.
2. Using a Torx[®] screwdriver, remove the endcap nearest to the installed location of the new lighthead.
3. Slide the necessary lenses and lens dividers out of the extrusion until the desired lighthead housing is accessible.
4. Using a small, flat blade screwdriver, gently disengage the lighthead housing's retaining fingers from the filler panel's mounting tabs and remove panel from the lightbar.
5. Plug the new lighthead connector into the connector found in the lighthead housing and snap the lighthead into place. Confirm all four retaining fingers fully engage the lighthead's mounting tabs.
6. Reconnect the lightbar to the battery and test the operation of the newly installed lighthead. If the

new lighthead does not function properly, contact customer service.

7. Return the items removed in step 3 to their original position and remount the endcap. Tighten mounting screws to 40 in./lbs.

Top View

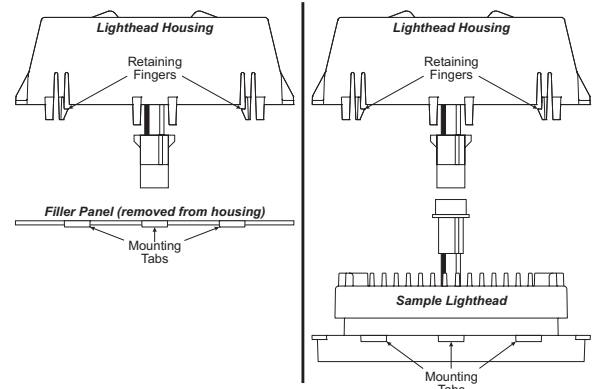

©2005 Whelen Engineering Company Inc.
Form No.13989A (021207)

For warranty information regarding this product, visit www.whelen.com/warranty